


微型充气泵KPM12A-3A


產品照片 Photo:



特性曲綫圖 Characteristic Curve:

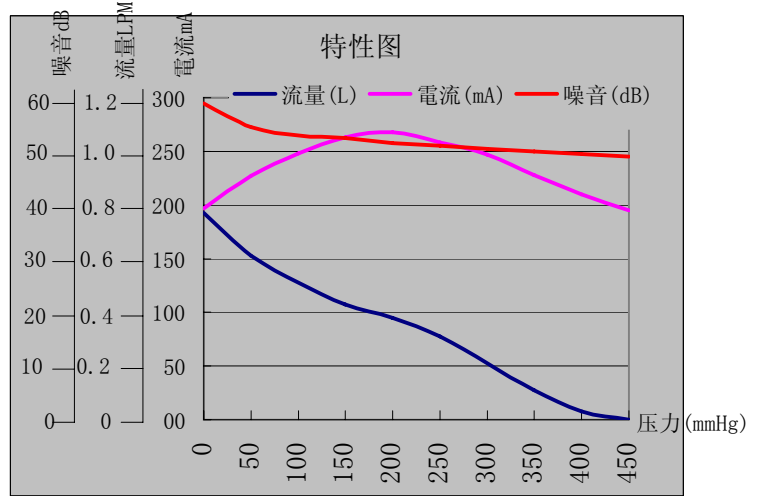

產品尺寸: Dimension

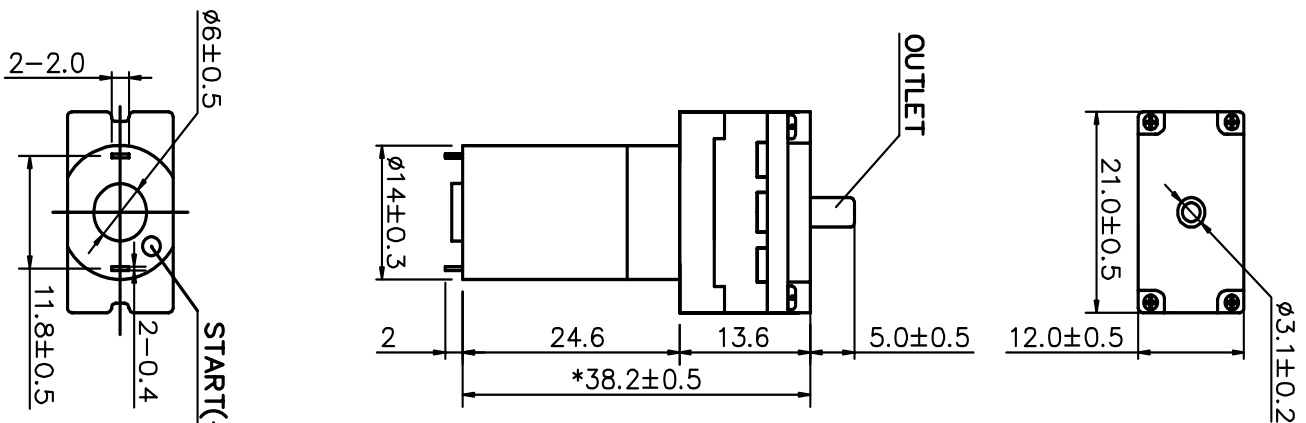

Unit: mm

產品特性: Characteristic

- |                                      |   |
|--------------------------------------|---|
| 1. 定格電壓 Rated Voltage                | DC3.0V  |
| 2. 使用電壓範圍 Range of Operating Voltage | DC2.0~ 3.2 V                                  |
| 3. 定格電流 Rated Current                | <300mA  |
| 4. 充氣時間 Inflation Time               | <11sec (From 0 to 300mmHg in a 50cc tank)     |
| 5. 消費功率 Power Consumption            | 0.9W  |
| 6. 使用流体 Fluid Applied                | Air   |
| 7. 氣嘴口徑 Outlet Port O.D.             | 3.1mm   |
| 8. 流量 Air Flow                       | >0.5LPM                                       |
| 9. 最大壓力 Maximum Pressure             | >350mmHg                                      |
| 10. 氣密性 Leakage                      | Max 3mmHg/min (From 300mmHg at 50cc tank)     |
| 11. 最低使用電壓 Restart Voltage           | 2.0V  |
| 12. 噪音 Noise                         | <65dB (30cm away)                             |
| 13. 壽命 Life                          | 30,000 times (on 7sec, off 7sec as one cycle) |